

COUNTY-W COUNTING SCALES

System: strain gauge
 Display: 3 groups of 14mm backlighted LCDs
 Main: 110-120-220-240Vac 50/60Hz
 Battery: Internal rechargeable
 Operating temperature: 0 +40°C
 RS232C serial output option
 Optional printer interface

basic

8301.215
8301.217

750g
3Kg

Display resolution:
 Internal resolution:


1/15,000
 1/300,000



8301.215



8301.217

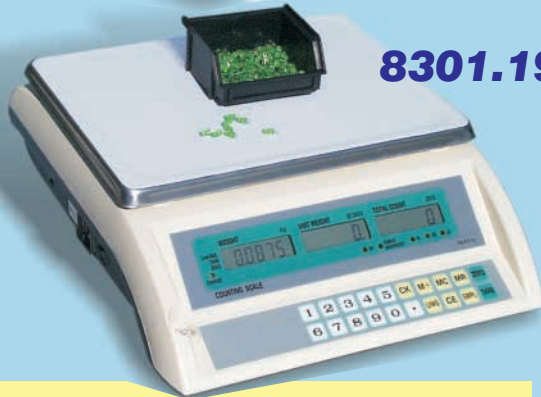

8301.190

high resolution

8301.190
8301.191
8301.192
8301.193

3Kg
6Kg
15Kg
30Kg

Display resolution:
 Internal resolution:

1/30,000
 1/480,000

professional

8301.200

6Kg

Display resolution: : 1/30.000
 Internal resolution: 1/600.000
 - Auto-Calibration: software
 - 50 unit weight memory cells



8301.200

MODEL	CAPACITY	DISPLAY RESOLUTION	INTERNAL RESOLUTION	MINIMUM UNIT WEIGHT	PLATTER SIZE
8301.215	300g	0,02g	0,005g	0,04g	Ø 150 mm
	750g	0,05g	0,01g	0,08g	
8301.217	1500g	0,1g	0,02g	0,2g	235 x 178 mm
	3000g	0,2g	0,04g	0,4g	
8301.190	3000g	0,1g	0,01g	0,1g	334 x 245 mm
8301.191	6000g	0,2g	0,02g	0,2g	334 x 245 mm
8301.192	15000g	0,5g	0,05g	0,5g	334 x 245 mm
8301.193	30000g	1g	0,1g	1g	334 x 245 mm
8301.200	6000g	0,2g	0,01g	0,1g	320 x 240 mm

8301.197 RS232C serial output option (to be installed before shipment),
 8301.195 RS232C serial output option (to be installed before shipment),
 8301.196 Optional printer interface (to be installed before shipment),

for models 8301.215/217
 for models 8301.190/191/192/193
 for models 8301.190/191/193/193

8301.202 RS232C serial output option (to be installed before shipment)
 8301.203 Optional printer interface (to be installed before shipment)
 8301.355 ISO9000 Traceable® Certificate

for models 8301.200
 for models 8301.200



Precision Balance

Precision electronic balance with anti-dust and anti-wind covers for to minimise the mistakes caused by the environment. Normal weighting, piece counting, and percentage counting modes.

Weighing units: 13 selectable (Gram, Carat, Ounce, etc.)
 Pan size: Ø 125mm (4.9 inches)
 Scale dimensions: 220 x 180 x 160(H)mm
 Measuring system: Strain Gauge Load Cell
 Display: liquid crystal 14mm, with backlight
 Set up: can be configured by the customer
 Display resolution: 1 / 30,000
 Internal resolution: 1 / 150,000
 Interface: Uni-direction RS232C
 Power: AC/DC adaptor operated by 230V or 115Vac (specify in the order) with 4 alkaline batteries size C(UM-2), 100 hours operation

8301.230

Model	Capacity	Display resolution	Internal resolution
8301.230	150g	0.005g	0.001g
8301.231	300g	0.01g	0.002g
8301.232	600g	0.02g	0.004g

Platform Counting Scale

Accurate and efficient industrial model



Measuring system: strain gauge
 Pan size: 510 x 420mm (16 x 20inches)
 Total height: 1m
 Calibration: by software
 Display: liquid crystal 14mm, with backlight
 Display resolution: 1/15.000 - 10g@150Kg
 Internal resolution: 1/300.000
 Set up: can be configured by the customer
 Power: 110-120-220-240Vac 50/60Hz
 Internal rechargeable battery: 120 hours operation

8301.225
8301.221

Platform counting scale 150Kgs
 Optional RS232C interface



THERMAL LABEL PRINTER

8301.223 THERMO-ADHESIVE LABEL PRINTER, can be fitted to COUNTY-W counters for the printing of the following data:
 total weight, unit weight
 total quantity.

WARNING: optional printer interface must be added to the scale.
 AC Adaptor 115-230Vac and Data Cable included.


8301.091 THERMO-ADHESIVE ROLL PAPER 30m length. It is possible to obtain about 500 labels.

SERIES CRANE SCALE

For medium capacity industrial applications such as under-hook crane load weighing and material testing, suitable for indoor and outdoor use.

Infrared remote control included. (Distance approx. 15 m)
 6V/10AH rechargeable battery, recharge time about 10 hours.
 Data-Hold function.

Model	Capacity	Res.	Dimensions mm				Weight
			A	B	C	D	
8301.245	1000kg	500g	56	30	500	560	13kg
8301.247	3000kg	1kg	56	30	500	560	20kg

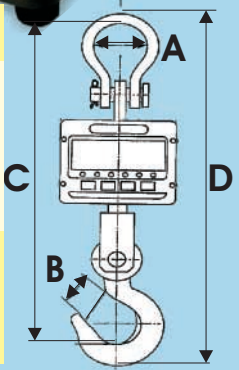

Test Weights

All counting scales can be calibrated using the internal software, and a certified test weight. To achieve optimum accuracy from the balance, it should be adjusted in the locality where it is used, because the latitude and longitude affect the calibration and the strain gauge cell could go out of adjustment during the transportation.

8301.296	Test Weight	0.02Kg	F1 class - case - DKD certificate
8301.300	Test Weight	0.1Kg	F1 class - case - DKD certificate
8301.303	Test Weight	0.5Kg	F1 class - case - DKD certificate
8301.305	Test Weight	1Kg	F1 class - case - DKD certificate
8301.310	Test Weight	2Kg	F1 class - case - DKD certificate
8301.315	Test Weight	10Kg	F1 class - case - DKD certificate

