

## HAND HELD CRIMPER SEALER

Model	7914.172	7914.175	7914.176	7914.177
Weldable material	polyethylene	cellophane, wax paper, aluminium or moisture barrier bags	cellophane, wax paper, aluminium or moisture barrier bags	cellophane, wax paper, aluminium or moisture barrier bags
Soldering length (mm)	150	150	300	400
Max. soldering thickness(mm)	2x0,15	2x0,15 Aluminium bag	2x0,15 Aluminium bag	2x0,15 Aluminium bag
Seal width (mm)	2	15	12	12
Power (W)	25	50	320	420
Weight (kg)	0,5	1	2,5	3,5
heating jaws	1	2	2	2
Finishing	flat	embossed	embossed	embossed
Temp.Adjustment	50-200°C	50-200°C	50-200°C	50-200°C



7914.172



7914.175




7914.176-177

## HAND SEALERS

The welding time is adjustable, to match the type and thickness of material. The models with cutting blade can be used to produce bags from tubing or to seal filled bags and to trim the exceeding material.

Seal width : 2mm  
Max.Sealable Thickness : 2x0.125mm

Model	Sealing length	Power (Watts)	Weight (Kg)
7914.201	200	260	4
7914.211 with cutter blade	200	260	4
7914.221	300	380	5
7914.222 with cutter blade	300	380	5
7914.231	400	500	6
7914.232 with cutter blade	400	500	6
7914.233 with cutter blade	500	550	7

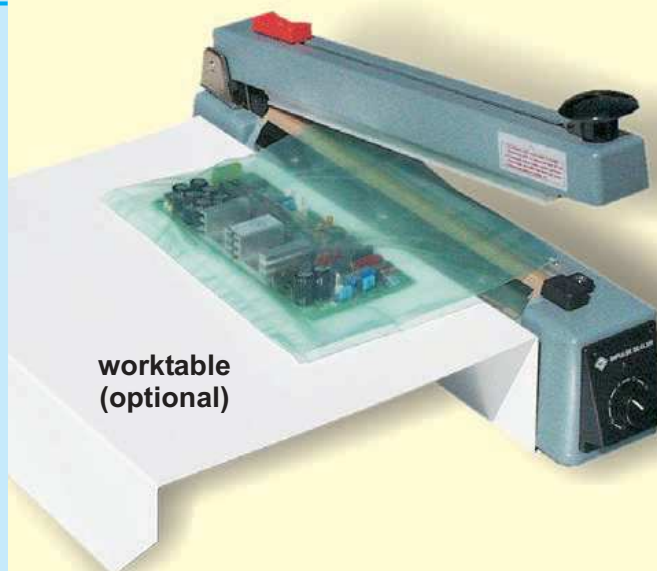

worktable (optional)

7914.215



7914.216 stainless steel

## HAND SEALER (MEDICAL)

Recommended for the health care industry, creates water-tight seals on sterilisation rolls (paper-plastic) and sterilisation tubing (plastic-plastic) materials.

The welding time is adjustable, to match the type and thickness of material, an audible beep advises when the seal is complete. Each seal has a deeply embossed texture.

- Soldering width: 10mm (according DIN58953)  
- Max.Sealable Thickness : 2x0.2mm

Model	Sealing length	Power (Watts)	Weight (Kg)
7914.215	200	1000	6,5
7914.216 stainless steel	300	1200	8



Holding Magnet

## HAND SEALER WITH HOLDING MAGNET AND CUTTER

The machine operates quickly and efficiently with magnet hold, offering consistent secure sealing for every package. After the seal cycle the machine re-opens automatically.

- Adjustable welding and cooling time.
- Uniform set contact pressure.
- Welds all types of thermoplastic films.
- Easy and simple to operate.

Seal width: 5mm  
Max. seal thickness: 2x0.15mm

7914.245	Hand Sealer with holding magnet and Cutting Blade	Max. seal length: 300mm
7914.246	Hand Sealer with holding magnet and Cutting Blade	Max. seal length: 400mm

### ACCESSORIES FOR HAND SEALERS

7914.217	Worktable for sealing unit 200mm
7914.227	Worktable for sealing unit 300mm
7914.237	Worktable for sealing unit 400mm
7914.226	Holder for tubing roll, maximum width 310mm
7914.236	Holder for tubing roll, maximum width 510mm




## DOUBLE AUTOMATIC HEAT SEALER

Heavy duty, single or double, automatic or manual impulse heat sealer. Seals up to 0.5mm gusseted or regular thermoplastic film.

Separate programmable timers (for sealing, cooling and recycle time when in automatic mode). Foot switch included for manual operation.

Seal width: 10mm  
Max. seal thickness: 2x0.15mm

7914.247	Automatic heat sealer 300mm (2000W - weight 22kg)
7914.247V	Automatic heat sealer 300mm with floor support
7914.248	Automatic heat sealer 450mm (2500W - weight 24kg)
7914.248V	Automatic heat sealer 450mm with floor support
7914.249	Automatic heat sealer 600mm (3000W - weight 26kg)
7914.249V	Automatic heat sealer 600mm with floor support

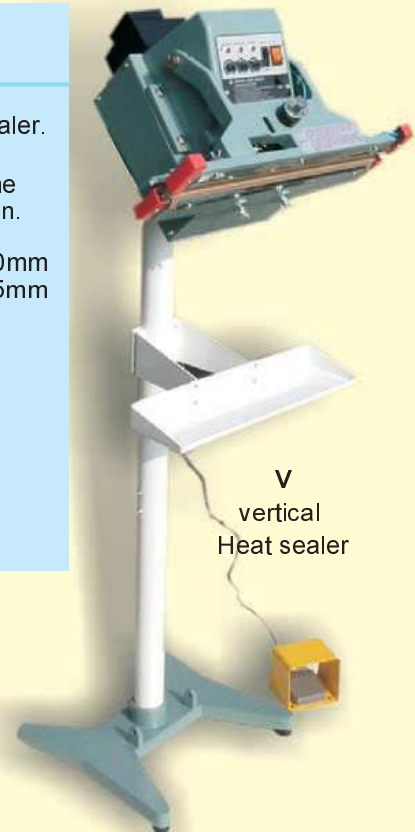

V  
vertical  
Heat sealer

## AUTOMATIC HEAT SEALER WITH TEMPERATURE CONTROL

Heavy duty, constant temperature, magnet hold, automatic or manual impulse heat sealer.

The machine is suitable for heavy bags like poly-cello films, aluminum foil or moisture barrier bags.

Each seal has a deeply embossed texture.



Seal width: 15mm  
Max. seal thickness: 2 x 0,25mm  
Temperature range: 30 - 199°C  
Sealing time: 0,2 - 2,5 sec  
Recycle time (automatic mode): 1 - 8 sec

7914.163	Constant automatic heat sealer 200mm (350W - weight 15kg)
7914.165	Constant automatic heat sealer 400mm (520W - weight 19kg)
7914.166	Constant automatic heat sealer 600mm (600W - weight 22kg)



## AUTOMATIC BAND SEALERS



**7914.191**

These versatile portable band sealers, available in horizontal and vertical feed, are designed for sealing all kinds of plastic materials and bag.

The vertical model is ideal for the packaging of bags containing spillable items such as powders or liquids.

Standard embossing attachment allows to print date and lot coding on the bag (till to 39 numbers)

Model	External dimensions (mm)	Conveyor width (mm)	Weight (kg)
<b>7914.190</b> horizontal	805x460x280(H)	150	30
<b>7914.191</b> vertical	805x320x640(H)	150	30
<b>7914.192</b> horizontal	805x610x280(H)	300	32
<b>7914.193</b> vertical	805x370x640(H)	300	32

Construction	stainless steel
Seal width	8mm
Max. Seal thickness (PE)	800µm
Max. Length of the bags	300mm
Conveyor speed	0-12m/min
Max. conveyor load	6kg
Temperature range	30-300°C
Power	500W

<b>7914.190</b>	Horizontal automatic band sealer, conveyor width 150mm
<b>7914.191</b>	Vertical automatic band sealer, conveyor width 150mm
<b>7914.192</b>	Horizontal automatic band sealer, conveyor width 300mm
<b>7914.193</b>	Vertical automatic band sealer, conveyor width 300mm



**7914.190**



## SHRINK WRAP SYSTEM

- Works on monofolded shrink film (already perforated to let the air flow out).
- Sealing bar with timer, to be used in 2 steps.
- Warming by means of a heating gun, 2 speeds.

Model	Sealing length (mm)	Sealer Power (Watts)	Heat Gun Power (Watts)
<b>7914.255</b>	450	350	600/1200
<b>7914.257</b>	600	450	600/1200

## VACUUM TANK SEALERS

<b>7914.262</b>	Vacuum tank sealer
Seal length	400 x 5 mm
Vacuum pump	Oil bath, 20m <sup>3</sup> /h.
Chamber capacity	410x400x90 mm
Power supply:	230V/50Hz 2kW

<b>7914.263</b>	Vacuum tank sealer
Seal length	450 x 5 mm
Vacuum pump	Oil bath, 20m <sup>3</sup> /h.
Chamber capacity	460x450x90 mm
Power supply:	230V/50Hz 2kW

